


POWER SECTION

ROTOR SPECIFICATIONS		
	Inch	mm
Overall Length	129.0	3277
Contour Length	124.0	3150
Eccentricity	0.23725	6.03
Major Diameter	2.049	52.04
Head Diameter	2.000	50.80
Weight	74 (lbs)	33.6 (kg)
Material	17-4SS	
Thread Form*	1.375 - 6 STUB ACME	


STATOR SPECIFICATIONS		
	Inch	mm
Overall Length	135.0	3429
Rubber Cut Back	6.0	152
Tube O.D.	3.75	95.3
Tube I.D.	3.00	76.2
Weight	170 (lbs)	77 (kg)
Number of Stages	8.0	
Rubber Type	NBR-1A	
Tube Material	4142 Seamless Tubing	

FIT INFORMATION		
NBR-1A	Minor Diameter	
Stator Size	Inch	mm
Standard	1.577	40.06
Oversize		
Double Oversize		
Nominal Fit at 75 F (25 C)		
Standard	-0.002	-0.05
Oversize		
Double Oversize		

* Alternate or custom thread forms are available

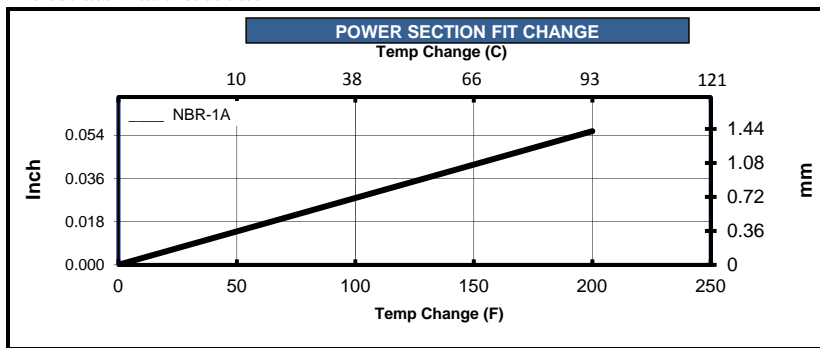

PERFORMANCE SPECIFICATIONS		PERFORMANCE DETAILS	
Torque Slope	0.483 ft-lb/psi 0.095 Nm/kPa	Max Diff Press psi (kPa)	1200 (8270)
Flow Range	80 to 160 GPM 300 to 610 Litre/min	Max Torque ft-lb (Nm)	580 (790)
Rotation	5.800 Rev/Gal 1.532 Rev/Litre	Stall Diff Press psi (kPa)	1800 (12410)
Speed Range	464 to 930 RPM	Stall Torque ft-lb (Nm)	870 (1180)
Off Bottom Press	150 psi 1030 kPa	Max Recommended HP(kW)	102 (76)

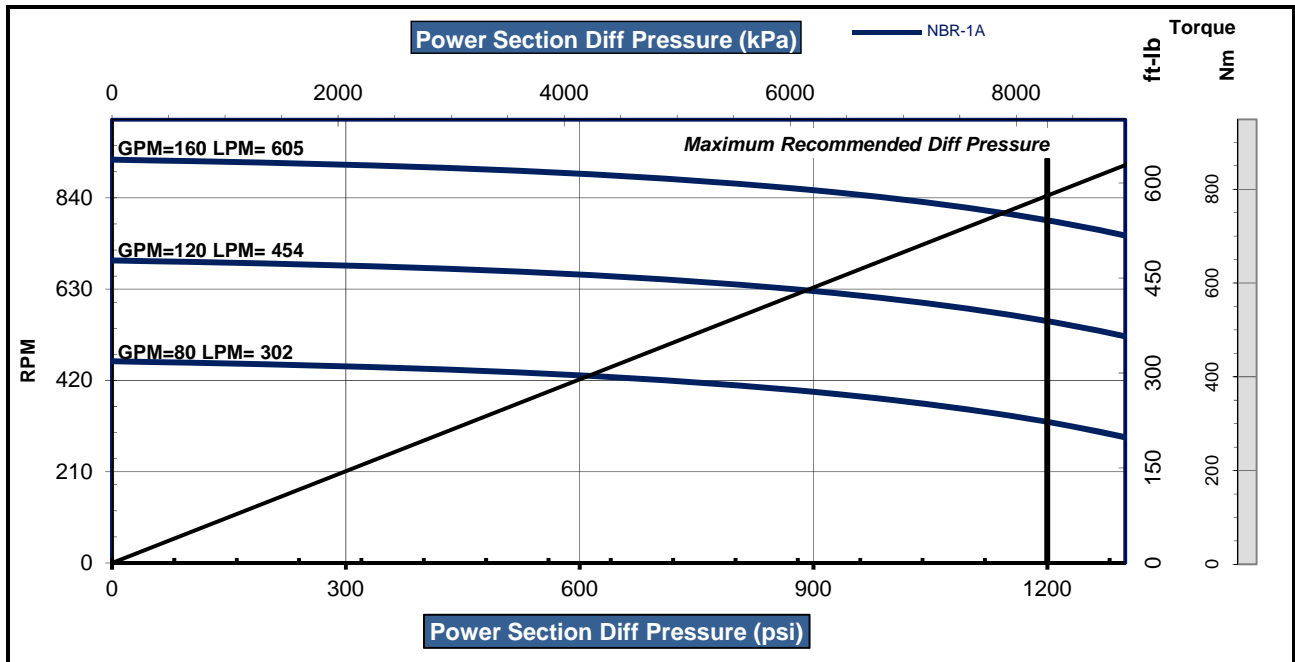

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance Curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice. Power calculation is based on maximum RPM and full torque. Stator sizes subject to change without notice. Copyright 2015 Dyna-Drill®. All rights reserved.