



## POWER SECTION



FIT INFORMATION - MINOR DIAMETER (in)				
Stator Size	NBR-1A	DynaPower		
		XR	HR	XP
1 Undersize		2.764*	2.757	2.757*
0.5 Oversize		2.783*	2.777	2.777*
1 Oversize				2.785*
2 Oversize		2.797*	2.794	2.794*
Nominal Fit at 75°F				
1 Undersize		0.005*	0.012	0.012*
0.5 Oversize		-0.014*	-0.008	-0.008*
1 Oversize				-0.016*
2 Oversize		-0.028*	-0.025	-0.025*

ROTOR SPECIFICATIONS		STATOR SPECIFICATIONS	
	(in)		(in)
Overall Length	214.8	Overall Length	235.0
Contour Length	208.8	Rubber Cutback #1**	8.0
Eccentricity	0.177	Rubber Cutback #2**	15.5
Major Diameter	3.122	Tube O.D.	5.00
Head Diameter	3.250	Tube I.D.	3.88
Weight (lb)	356	Weight (lb)	558
Material	17-4SS	Number of Stages	3.7
Thread Form**	2 3/8 Hughes External Flush		

\*Pending production measurements

\*\* Alternate or custom thread forms and cutbacks are available upon request

PERFORMANCE SPECIFICATIONS						
			NBR-1A	XR	HR	XP
Torque Slope	6.901 ft-lb/psi	Max. Diff. Press. (psi)		830	830	930
Flow Range	150 to 350 GPM	Max. Torque (ft-lb)		5750	5750	6380
RPG	0.368 rev/gal	Stall Diff. Press. (psi)		1250	1250	1390
Speed Range	55 to 129 RPM	Stall Torque (ft-lb)		8620	8620	9580
Off Bottom Press.	66 psi	Max. Recommended (HP)		125	125	138
		PSI Per Stage		225	225	250
		PSI Per Cavity		37	37	41
		Temperature Slope (in/°F)		0.000196	0.000207	0.000207

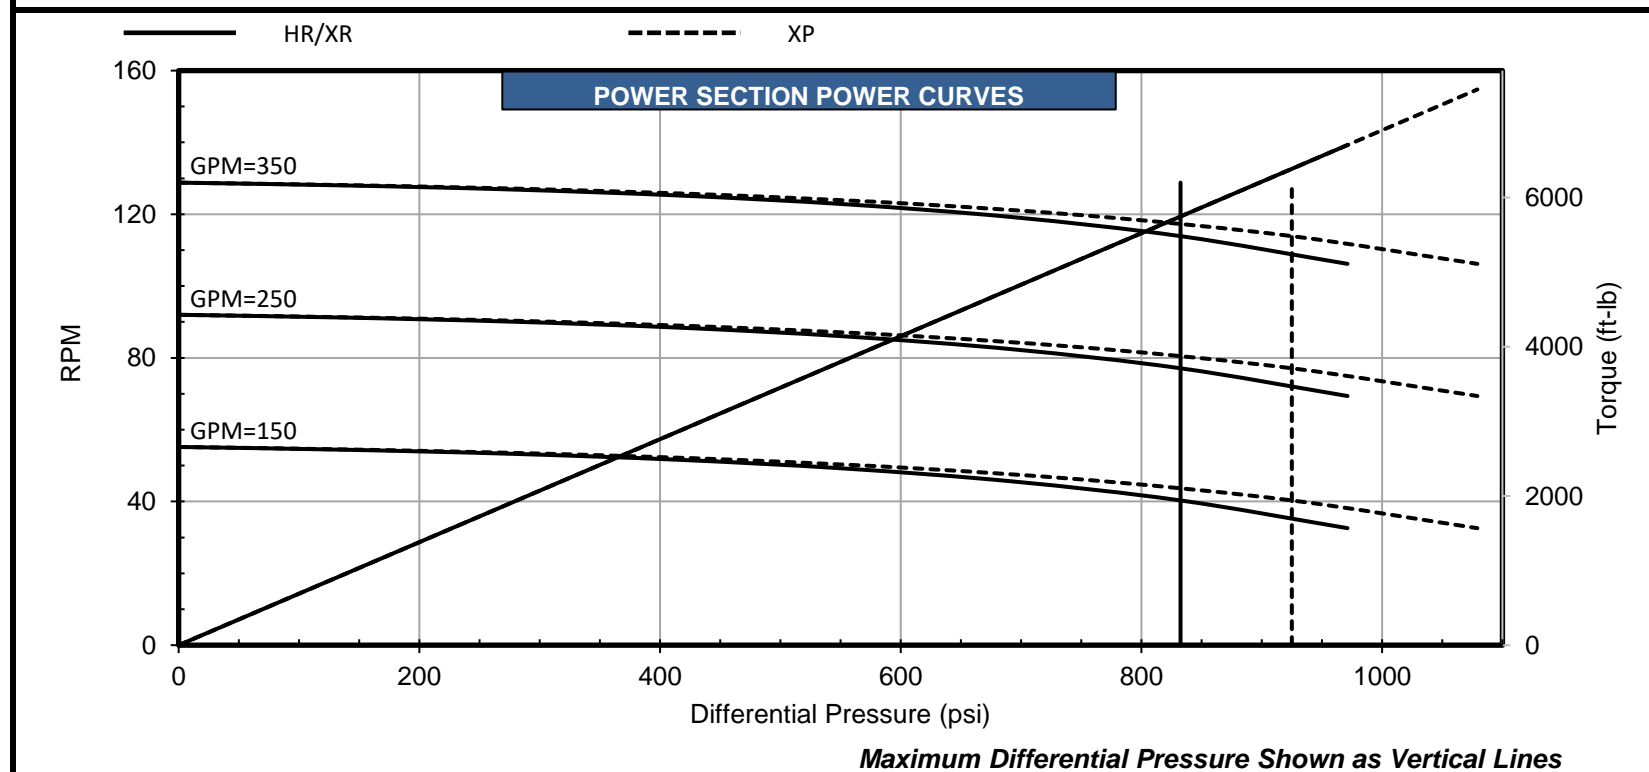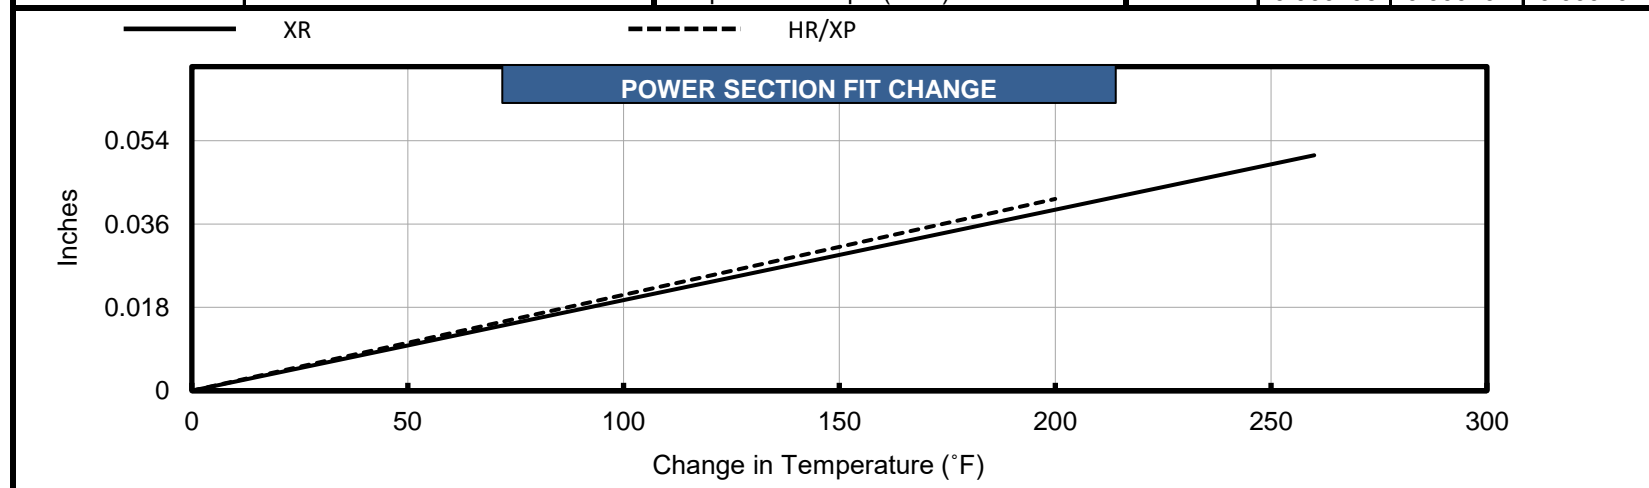

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice. Power calculation is based on maximum RPM and full torque. Stator sizes subject to change without notice.



## POWER SECTION



FIT INFORMATION - MINOR DIAMETER (mm)				
Stator Size	NBR-1A	DynaPower		
		XR	HR	XP
1 Undersize		70.21*	70.03	70.03*
0.5 Oversize		70.69*	70.54	70.54*
1 Oversize				70.74*
2 Oversize		71.04*	70.97	70.97*
Nominal Fit at 75°F				
1 Undersize		0.13*	0.30	0.30*
0.5 Oversize		-0.36*	-0.20	-0.20*
1 Oversize				-0.41*
2 Oversize		-0.71*	-0.64	-0.64*

ROTOR SPECIFICATIONS		STATOR SPECIFICATIONS	
	(mm)		(mm)
Overall Length	5455.9	Overall Length	5969.0
Contour Length	5303.5	Rubber Cutback #1**	203.2
Eccentricity	4.48	Rubber Cutback #2**	393.7
Major Diameter	79.30	Tube O.D.	127.0
Head Diameter	82.55	Tube I.D.	98.6
Weight (kg)	161	Weight (kg)	253
Material	17-4SS	Number of Stages	3.7
Thread Form**	2 3/8 Hughes External Flush		

\*Pending production measurements

\*\* Alternate or custom thread forms and cutbacks are available upon request

PERFORMANCE SPECIFICATIONS						
		NBR-1A	XR	HR	XP	
Torque Slope	1.357 Nm/kPa		5723	5723	6412	Max. Diff. Press. (kPa)
Flow Range	568 to 1325 Litre/min		7796	7796	8650	Max. Torque (Nm)
RPG	0.097 rev/litre		8618	8618	9584	Stall Diff. Press. (kPa)
Speed Range	55 to 129 RPM		11687	11687	12989	Stall Torque (Nm)
Off Bottom Press.	455 kPa		93	93	103	Max. Recommended (kW)
			1551	1551	1724	kPa Per Stage
			255	255	283	kPa Per Cavity
			0.0089	0.0095	0.0095	Temperature Slope (mm/°C)

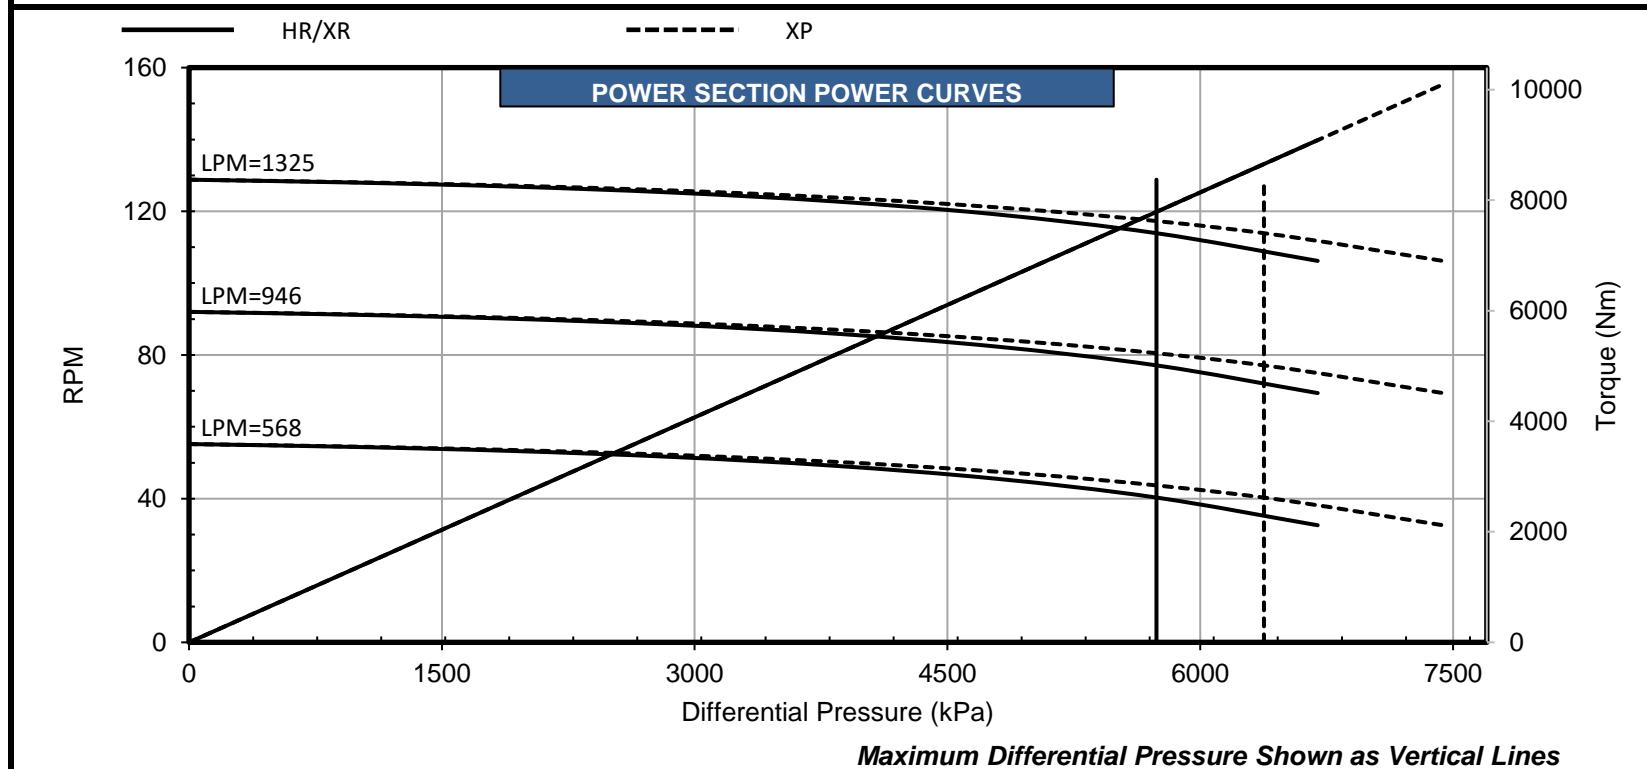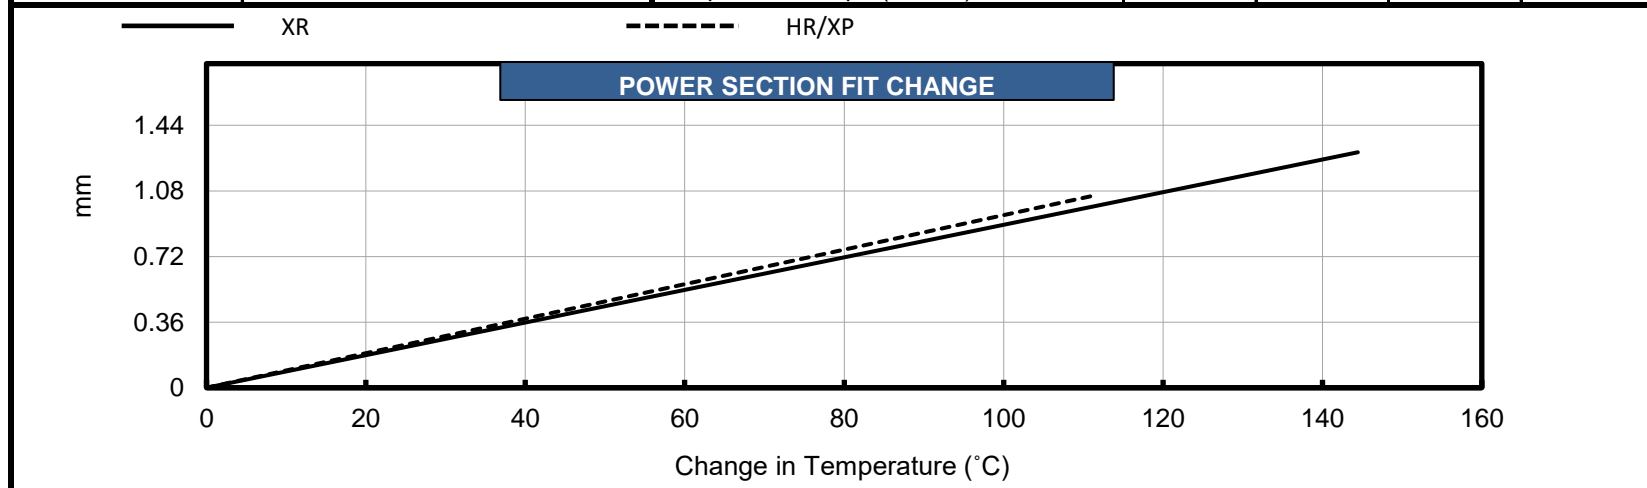

Operating a power section above the maximum recommended differential pressure will reduce stator life. Performance curves are for reference only. Actual power section performance may vary depending on the down hole temperature and rotor/stator fit. Performance data are subject to change without notice. Power calculation is based on maximum RPM and full torque. Stator sizes subject to change without notice.